



Only Heating



Product Brochure

Wall-Hung Type
Premix & Gas Adaptive System
Condensing System Boiler

Enerwa Plus

		+	
2500 H	25 kW		31 kW
3000 H	30 kW		35 kW
3500 H	35 kW		40 kW


When a storage tank for DHW is installed to the system boiler.

Enerwa


25-30-35 kW

Wall-hung condensing boilers, room sealed and fan assisted heating only version

Enerwa Plus

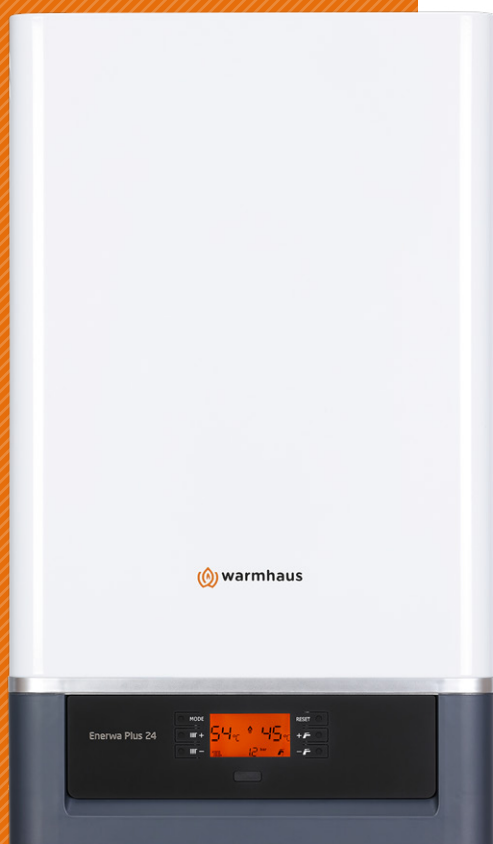

**11 Reasons
to Choose
Enerwa
Boilers**



Gas Adaptive System

Enerwa Plus boilers have gas adaptive system features that provide continuous high efficiency by adjusting the ideal air and gas ratio.




High Productivity in all Season with 1:10 Modulation Ratio

It ensures high productivity every time both in mid-season and at while minimum power is needed with cutting ability its maximum power 1:10 ratio.



Powerful Built-in Pump

With the built-in powerful Grundfos circulation pump, it meets your needs even in large installations up to 2500 l/h.




Stainless Steel Exchanger

High efficient coil type exchanger provides long product life and decreases clogging risk to minimum with its watertight and wide hydraulic channels.



Cascade up to 6 boilers & 210 kW power

Central heating capacity up to 210 kW with 6 boilers can be obtained easily with cascade installation.



Compact Dimensions & Less Installation Area

(W:420 x D:288 x H:725 mm)

Compact dimensions and adjacent installation capability allows installation with less area.



Multi-zone management

With an external optional module, 4 heating zone or 1 heating zone plus 1 underfloor zone can be controlled.



User Friendly Control Panel

Illuminated wide information screen shows heater, hot usage water, installation pressure, Outside Sensor connection and room thermostat connection and flame modulation in the screen at the same time.




Perfect Body Insulation

High usage efficiency is ensured by insulation which prevents heat loss from boiler body and decreases noise level.

Side cover: 15 mm insulation thickness

Front cover: 20 mm insulation thickness



Hot Water Tank Connection

If you need plenty of domestic hot water, you can connect Enerwa and Enerwa Plus boilers (with optional accessories) to one hot water tank. You have the option by heating only one hot water tank or you can connect both your central heating system and hot water tank.







Hermetic Flue Connection

Warmhaus Enerwa Plus boilers have room sealed hermetic boiler design and compatible with Ø60/100 mm concentric flue connection. Each boiler can be used with its own flue sets independent from each other which makes cascade systems easy to install in roof spaces without a stainless steel flue.

Dimensions & Connections




1. OFF / Winter / Summer button
2. C.H. temperature increase button
3. C.H. temperature reduce button
4. Reset button
5. D.H.W. temperature increase button
6. D.H.W. temperature reduce button

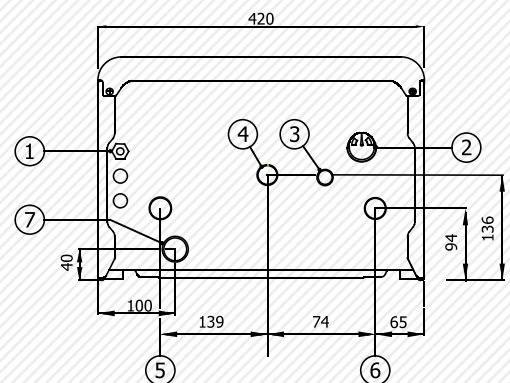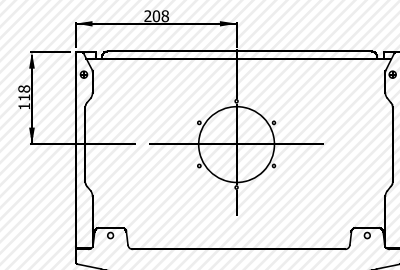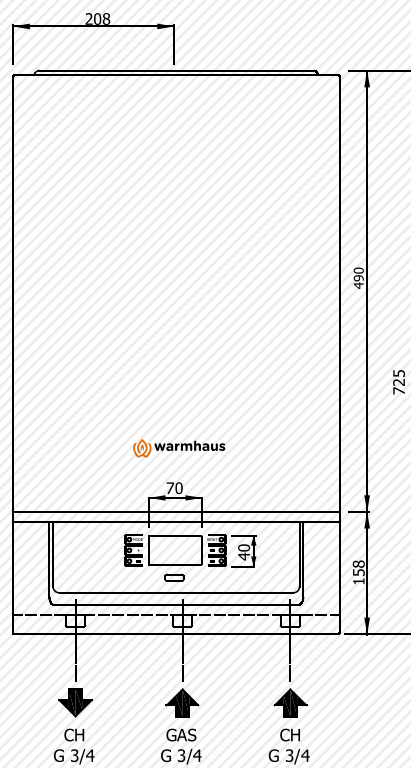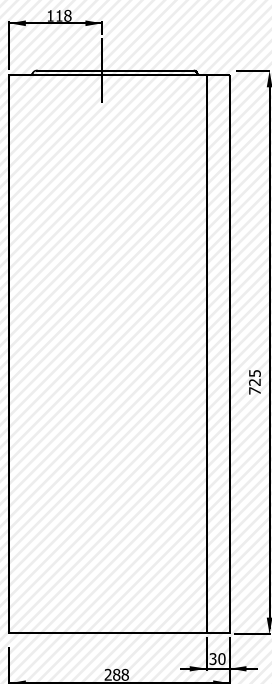

1. 230 V AC Electrical Connection
2. Manometer
3. Safety Valve Drain
4. Gas Inlet
5. Central Heating Flow (Ch)
6. Central Heating Return (Ch)
7. Condensate Drain

Components

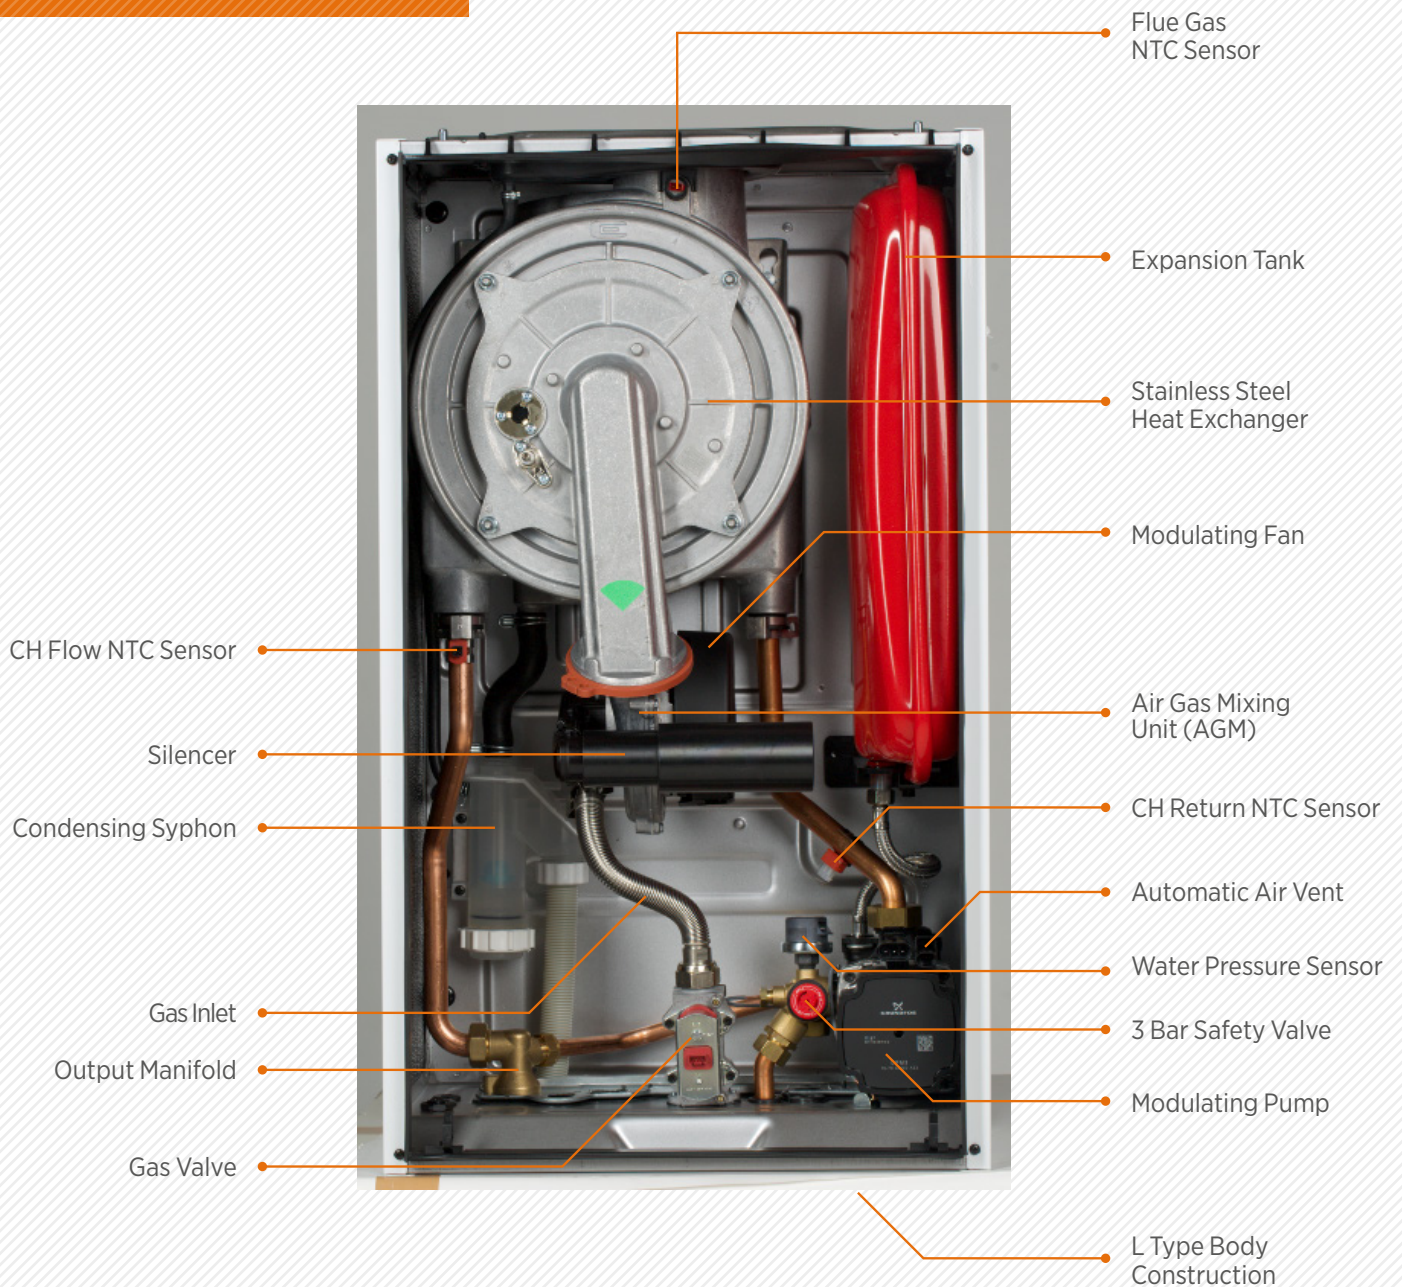


Long Lasting
and Smooth Use
With High-Quality
Components









The heating only versions (Enerwa Plus HO) can be combined with a separate storage tank using the appropriate optional kit (AVC 220 Motorized Three Way Valve code 152.11.003.000004). The kit is comprised of a motor and connector, to motorize the three-way valve and hydraulic fittings. Hot water storage tanks can be chosen in different capacities according to requirements.

Optional Heating Control Accessories

Room Thermostats & Heating Controls

Product Code	Product Name	Explanation	Product View
153.11.660.600020	WT-07 Cabled Room Thermostat	With minimal dimensions and decreased 4 button keypad Remote control which is connected to boiler with cable can work in modulation, run weekly programs, adjust hot usage water and show boiler fault code in the screen and reset it. Daily 8 program can be applied for adjusting heating and Domestic Hot Water (Hot Water Storage Tank).	
153.11.660.600021	WT-08 Cabled Wide Screen Room Thermostat	This remote control unit, which also has room thermostat feature, is connected to the combi boiler with cable and has 10-button keypad, where each function is assigned separately. This remote control features work in modulation, runs weekly programme, has DHW adjustment, shows boiler fault code on the screen and reset it. Daily 6 program can be applied for adjusting heating and Domestic Hot Water (Hot Water Storage Tank).	
153.11.660.600022	WT-RF03 Wireless Wide Screen Room Thermostat	This remote control unit, which also has room thermostat feature, is connected to the combi boiler with wireless and has 10-button keypad, where each function is assigned separately. This remote control features modulated operation according to room temperature, weekly programs, DHW adjustment and display of the boiler fault code on the display and reset it. There are 6 daily programs for heating and DHW heating. Daily 6 program can be applied for adjusting heating and Domestic Hot Water (Hot Water Storage Tank).	


System Accessories

Product Code	Product Name	Explanation	Product View
153.11.660.600046	MLC 27 Cascade Module	Control unit ensures Enerwa Plus HO boilers to work as cascade.	
153.11.660.600047	MLC 30 Multiple Zone Module	Control unit which controls Enerwa Plus HO boilers low temperature/ Floor Heating Zone (mix fledged circuit)	
153.11.660.600049	QAZ 36 Immersion Boiler/ Hydraulic Separator Sensor	Immersion Sensor which is used to measure the temperature of Boiler or Hydraulic Separator and inform to the boiler.	
153.11.660.600050	AVC 220 Motorized Three Way Valve	Strap-on Temperature Sensor which ensures the measure of temperature on pipe at hydraulic separator. It is used to measure the temperature of flow water of low heating zone at the double heating zone.	
152.11.003.000004	AVC 220 Motorized Three Way	If a hot water tank is connected to a single boiler with a three-way valve, this accessory should be used. This product must be used with " Hot Water Storage Tank/ Hydraulic Separator Sensor".	
153.11.660.600001	WDHS-01 Outside Sensor	It is the sensor which measures the outside air temperature and inform maximum outgoing water temperature to the boiler. A single boiler heating system or cascade heating systems must be used with one Outside Sensor to save fuel.	

Sample Installation Scheme

Single System Scheme

Viwa 50-65 Single Boiler with 1 High Temperature Zone + Hot Water Storage Tank System Scheme Example

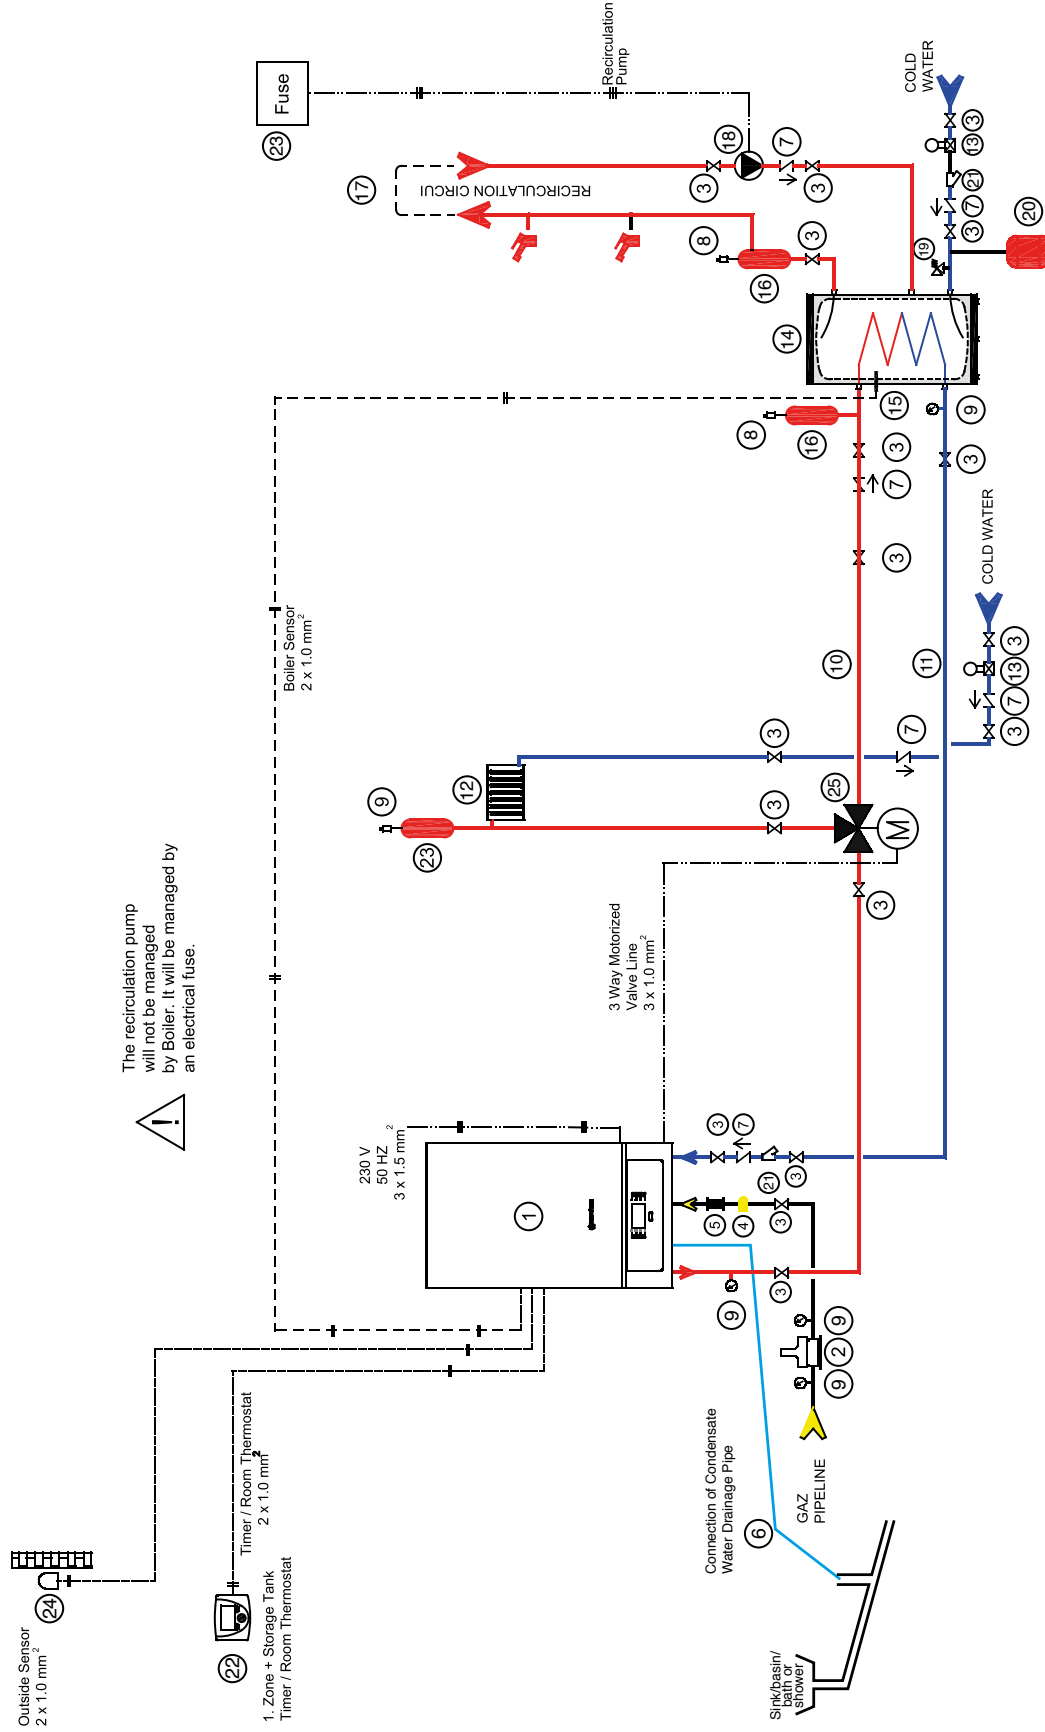









INSTALLATION EQUIPMENT


- | | | |
|------------------------------|-----------------------------------|---------------------------|
| 1. Boiler | 12. Heating System | 23. Fuse |
| 2. Gas Safety Solenoid Valve | 13. Pressure Reducer | 24. Outside Sensor |
| 3. Ball Valve | 14. Hot Water Storage Tank | 25. 3-Way Motorized Valve |
| 4. Gas Filter | 15. Hot Water Storage Tank Sensor | |
| 5. Vibration Isolator | 16. Air Separator | |
| 6. Condensate Water Siphon | 17. Hot Water Storage Tank | |
| | 18. Recirculation Pump | |
| | 19. Safety Valve | |
| | 20. Extension Tank | |
| | 21. Filter | |
| | 22. Timer / Room Thermostat | |

Flue Systems Accessories For Condensing Boilers

Ø60/100 mm


	Product Name	Product Code
	(Ø60/100) Condensed Concentric Horizontal Flue Set	153.11.014.000002
	(Ø60-100) Condensed Vertical Flue Set with Adapter L=1533	153.11.660.600013
	(Ø60/100) Condensed Flue Extension L=500 mm	153.11.660.600014
	(Ø60/100) Condensed Flue Extension L=1000 mm	153.11.660.600015
	(Ø60/100) Condensed Flue Extension L=2000 mm	153.11.660.600016
	(Ø60/100) Condensed 45° Elbow	153.11.660.600017
	(Ø60/100) Condensed 90° Elbow L=170 mm	153.11.660.600018
	(Ø60/100) Condensed Vertical Adapter L=130 mm	153.11.660.600019

Rear-Pipe Stand Off Kit

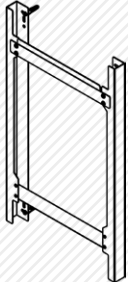
	Product Name	Product Code
	Rear-Pipe Stand Off Kit	151.11.04.003

Twin Flue Kits For Condensing Boilers (Ø80+Ø80 mm)


153.11.660.600096 Ø80 Twin Flue Set

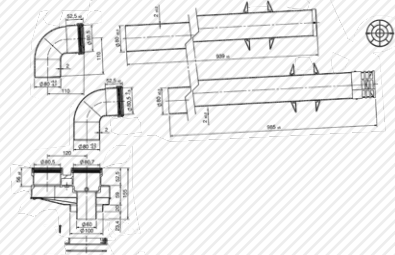

153.11.660.600102 Ø 60- Ø 80 Twin Flue Set Adapter



153.11.660.600091 Ø80 Condensed Twin Flue Extension Pipe L=500 mm




153.11.660.600092 Ø80 Condensed Twin Flue Extension Pipe L=1000 mm




153.11.660.600093 Ø80 Condensed Twin Flue Extension Pipe L=2000 mm




153.11.660.600094 Ø80 Twin Flue Bend (90°)




153.11.660.600095 Ø80 Twin Flue Bend (45°)




153.11.660.600099 Ø80 Interior Wall Rosette




153.11.660.600098 Ø80 Exterior Wall Rosette









153.11.660.600100 Ø80 Flue Vertical Outlet Adapter with Condensate Trap



153.11.660.600097 Ø80 Vertical Flue Kit



Plume Displacement Kits Ø60/100 mm

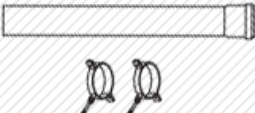	Product Name	Specification	Product Code
	Plume Displacement Terminal Kit	With 1 m Extension and Two Brackets	153.11.660.6000 31
	Plume Displacement Kit Bend	90°	153.11.660.6000 32
	Plume Displacement Kit Bend	45°	153.11.660.6000 33
	Plume Terminal		153.11.660.6000 34
	Clamp Pack		153.11.660.6000 35
	Plume Displacement Kit Extension and Brackets	1000 mm	153.11.660.6000 36

Technical Data

Technical Table	Unit	Enerwa Plus 2500 H				Enerwa Plus 3000 H				Enerwa Plus 3500 H			
CE Certificate		CE-1015CT0706 :18				CE-1015CT0706 :18				CE-1015CT0706 :18			
Gas Circuit *(Natural Gas G20) Heat Load (Hu=10,56 kWh/m ³)													
Gas type		G20	G25	G30	G31	G20	G25	G30	G31	G20	G25	G30	G31
Gas supply pressure	mbar	20	25	30	37	20	25	30	37	20	25	30	37
Gas Consumption at Maximum	m ³ /h	2,38*	2,85	0,73	0,92	3,05*	3,47	0,86	1,18	3,40*	4,13	0,99	1,30
Gas Consumption at Minimum	m ³ /h	0,37*	0,43	0,11	0,11	0,40*	0,46	0,11	0,14	0,43*	0,52	0,13	0,17
Premix System		Gas Adaptive*				Gas Adaptive*				Gas Adaptive*			
Modulation Range		01:10				01:10				01:10			
Efficiency		G20	G25	G30	G31	G20	G25	G30	G31	G20	G25	G30	G31
(80/60 °C) Efficiency at Maximum Heat Output	%	98	98	97	98	98	98	98	99	98	98	98	98
(50/30 °C) Efficiency at Maximum Heat Output	%	105	105	102	104	105	105	103	105	105	106	103	105
Efficiency at 30% load at 36/30 °C	%	108	108	104	108	108	108	105	107	107	107	105	107
Seasonal space heating energy efficiency (expressed in terms of GCV)	%	92 (Class A)				92 (Class A)				92 (Class A)			
Radiator Circuit		G20	G25	G30	G31	G20	G25	G30	G31	G20	G25	G30	G31
Maximum Heat Output Pn (80/60 °C)	kW	23,7	23,7	23,6	23,7	28	28	28	28	33,02	33,02	32,8	33,02
Minimum Heat Output Pn (80/60 °C)	kW	3	3	3,2	2,5	3,5	3,5	3,25	3,45	4,1	4,1	4,1	4,1
Maximum Heat Output Pn (50/30 °C)	kW	25	25	24,70	25	30	30	29,5	30	35,5	35,5	34,7	35,5
Minimum Heat Output Pn (50/30 °C)	kW	3,6	3,6	3,55	2,9	3,90	3,90	3,74	3,59	4,60	4,60	4,60	4,60
Temperature selection range (min+max) High/Low temperature	°C	25 - 80 / 25 - 47											
Operating Pressure (Minimum/Maximum)	bar	0,5/3				0,5/3				0,5/3			
Expansion tank useful volume	bar	8				10				10			
Pump pressure (at 1000 l/h flow rate)	mH ₂ O	6,5				6,5				6,5			
Pump pressure (at 500 l/h flow rate)	mH ₂ O	6,9				6,9				6,9			
Max. Pump Flow Rate	l/h	2500				2500				2500			
Pump Energy Efficiency Index (EEI)		≤ 0,20				≤ 0,20				≤ 0,20			
Electricity Circuit/Supply													
Electricity Consumption (Max./Min.)	Watt	95 / 55				104 / 60				115 / 65			
Protection Index	IP					IPX5D							
Exhaust Gas Circuit		G20	G25	G30	G31	G20	G25	G30	G31	G20	G25	G30	G31
(80/60 °C) Exhaust gas temperature (Min./Max.)	°C	69/71	65/70	57/70	60/70	61/66	55/65	57/67	58/65	57/62	57/62	54/67	58/67
(50/30 °C) Exhaust gas temperature (Min./Max.)	°C	49/51	48/49	43/57	47/51	45/45	44/44	42/50	43/45	47/44	47/45	41/48	49/49
NOx	Class	6				6				6			
Weighted value of Nox (GCV)	mg/kWh	20	19	42	31	41	31	43	49	34	32	43	53
General													
Dimensions (H x W X D)	mm	725 x 420 x 288				725 x 420 x 288				725 x 420 x 288			
Sound Level	dB (A)	52				54				50			
Hydraulic Group Material		Brass				Brass				Brass			
Net Weight/Packed Device Weight	kg	28 / 30,2				30 / 32,2				31 / 33,2			

Gas Adaptive (*): This boiler fitted with gas/air ratio controls. Gas and air ratio control settings must not be changed un autorised persons. The gas valve calibration method is explained on service manual and has to be done by Warmhaus official service.



Management Office

Nidakule Ataşehir Kuzey
Barbaros Mah. Begonya Sok.
No: 3 K: 19 D: 170-175
34746, Ataşehir / İstanbul / Turkey

T +90 216 300 16 50

Boiler Factory

İşiktepe OSB Mah.
Park Cad. No: 10
16140, Nilüfer / Bursa / Turkey

Radiator Factory

Minareliçavuş OSB Mah.
Selvi Cad. No: 3
16140, Nilüfer / Bursa / Turkey

T +90 224 295 94 00

F +90 224 411 23 77

United Kingdom (Subsidiary)

Unit 7, St Martins Business Centre
St Martins Way, Bedford MK42 0LF, England

T +44 207 164 6233

F +44 207 000 1336